

Technical Data Sheet

Peter Kwasny GmbH, Heilbronner Str. 96 74831 Gundelsheim / Germany Phone: +496269 95-0, Fax: +496269 95-80 www.spraymax.com / www.kwasny.com / info@kwasny.de

belton® robust Allround spray paint colour paint 400 ml apple green high gloss Art. Nr. 322021




Description / Area of use	Solvent-based, robust and universally applicable
	synthetic resin combination paint.
	Ideal for interior and exterior decorative paintwork.
	Weather, UV, bump, scratch and shock resistant.
	Fast drying and high coverage. High colour brilliance
	and even colour gradient. For long-lasting, beautiful
	painting results.
Product benefits	Universally applicable all-round paint spray
	 Solvent-based, for inside and outside
	 Weather and UV-resistant
	 Shock, scratch and impact resistant
	Fast drying
	High coverage
	High colour brilliance
	Uniform colour gradient
	Excellent painting results
Material base	Synthetic resin combination paint
<u>Substrate</u>	
	On many substrates, such as ferrous metals,
	wood, clay, stone, glass, ceramics, cardboard/paper
	can be used directly.

IGIIO

belton

For higher corrosion protection requirements, pre-treat with belton rust protection primer. Check plastics for compatibility, if necessary prime with belton plastic primer if necessary. Sand down wood and old paintwork, remove rust if necessary.

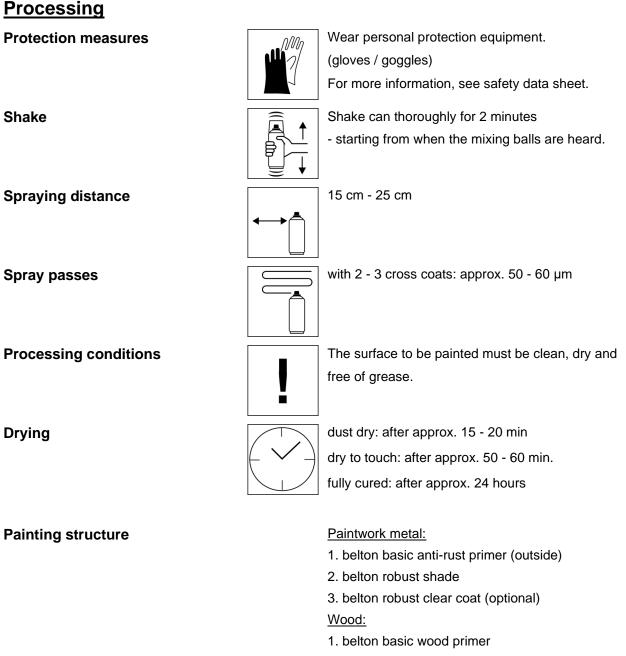

3. belton robust clear coat (optional)

belton

Plastic:

- 1. belton basic plastic primer
- 2. belton robust shade
- 3. belton robust clear coat (optional)

Styrofoam:

- 1. belton basic styrofoam primer
- 2. belton robust shade
- 3. belton robust clear coat (optional)

Recoatable: With yourself at any time

After finishing the painting process can turn around and spray the valve empty.

Additional Information

Please note

Finish

The shorter the spraying distance, the higher the working speed must be when painting. This is the only way that fine, filigree lines can be painted without any problems.

<u>DO NOT</u> spray on synthetic resin painted surface as paint may lift. Plastic substrates please check your tolerance. All other substrates such as stone, clay, ceramic, glass, cardboard/paper are (optional) included the belton universal primer.

Shelf Life

Disposal



The can is upright, dry and protected from chemical and mechanical influences to be stored and transported between 15 - 25° C.

The safety instructions on the can as well as all legal provisions of the storage location to note.

The completely emptied spray cans must be disposed of in the recycling system. Cans with hardened material must be disposed of as special waste.

Art.Nr. 322021

belton

Note

Before use, the safety instructions must always be read carefully and observed.

The contents in this technical data sheet were created with great care and reflect our current state of knowledge. They provide the user with application-specific information and do not promise certain properties. The information is non-binding and we accept no liability for its integrity, accuracy and completeness. They do not relieve the user of their duty to check the suitability of our product for the intended purpose. The warnings printed on our labels must be respected. Our brands and patents are protected by copyright. All rights reserved We reserve the right to update, amend or supplement the content of the information without prior notice.