

Technical Data Sheet

Peter Kwasny GmbH, Heilbronner Str. 96 74831 Gundelsheim / Germany Phone: +496269 95-0, Fax: +496269 95-80 www.spraymax.com / www.kwasny.com / info@kwasny.de

> **belton®** Special **Bronze lacquer gold** 400 ml Art. Nr. 323153



Product

Description / Area of use

Product benefits

Ма

Su

Decorative spray paint for handicrafts and decoration, especially in the living area. Gives smooth Surfaces a unique, creative antique look. Can be used inside and outside.


Weather and abrasion resistant.

roduct benefits	 Stylish antique bronze effect
	Metallic shine effect
	 High hiding power and fast drying
	 Very good flow and easy processing
	Very productive
	Weather-resistant, for inside and outside
	 Ideal for decorative items such as decorated
	picture frames etc.
	Recommendation:
	Paint over with belton clear coat
aterial base	Nitro combination resins
ubstrate	
	metal, wood, plastic, styrofoam, clay, ceramics, glass,
	stone, as well as rattan/raffia and cardboard/paper

etc.

belton

Processing

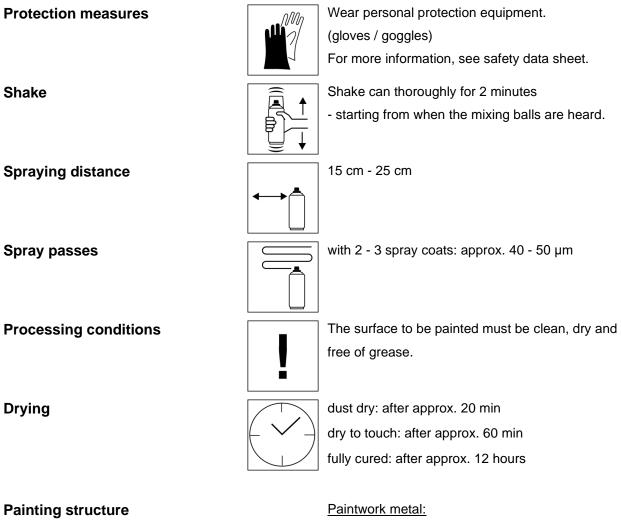

- 1. belton basic anti-rust primer (outside)
- 2. belton basic universal primer
- 3. belton special Bronze lacquer
- 4. belton clear coat for all effects (optional) <u>Wood:</u>
- 1. belton basic wood primer
- 2. belton special Bronze lacquer
- 3. belton clear coat for all effects (optional)
- Plastic:
- 1. belton basic plastic primer
- 2. belton special Bronze lacquer
- 3. belton clear coat for all effects (optional)

beltor

Styrofoam:

1. belton basic styrofoam primer

2. belton special Bronze lacque

belton clear coat for all effects (optional)
 Recoatable with itself at any time. After drying at any time with all belton paints and clear coat.

After finishing the painting process can turn around and spray the valve empty.



Finish

Additional Information

Please note

Paint over with belton clear coat for all effects (Art. no. 323 399).

Please check plastic substrates for compatibility. All other substrates such as stone, clay, ceramics, glass, rattan/bast, cardboard/paper should be primed with the belton universal primer.

Do not spray on synthetic resin painted surfaces, as the paint may pull up.

The can is upright, dry and protected from chemical and mechanical influences to be stored and transported between 15 - 25° C. The safety instructions on the can as well as all legal provisions of the storage location to note.



The completely emptied spray cans must be disposed of in the recycling system. Cans with hardened material must be disposed of as special waste.

Before use, the safety instructions must always be read carefully and observed.

The contents in this technical data sheet were created with great care and reflect our current state of knowledge. They provide the user with application-specific information and do not promise certain properties. The information is non-binding and we accept no liability for its integrity, accuracy and completeness. They do not relieve the user of their duty to check the suitability of our product for the intended purpose. The warnings printed on our labels must be respected. Our brands and patents are protected by copyright. All rights reserved We reserve the right to update, amend or supplement the content of the information without prior notice.

Shelf Life

Disposal

Note